



9211 iron



1029 white

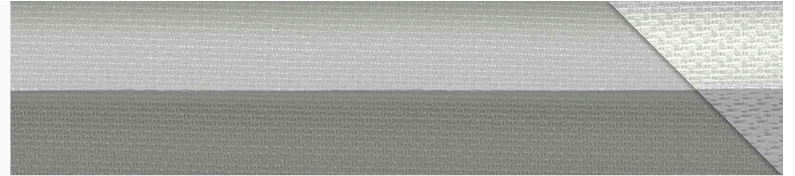

9210 silver

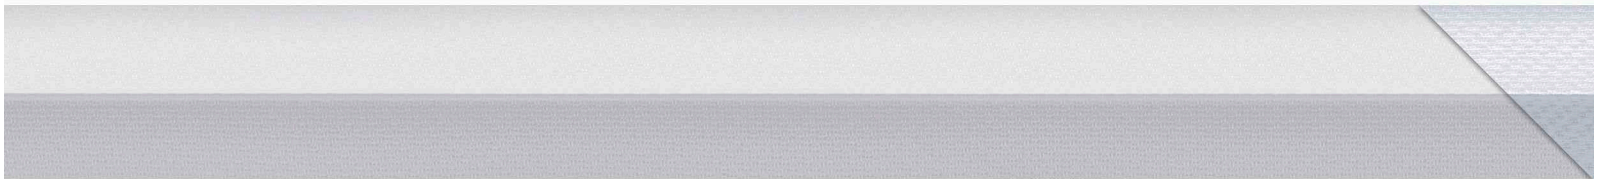

9134 light grey




9178 steel grey




9211 iron



1077 milk

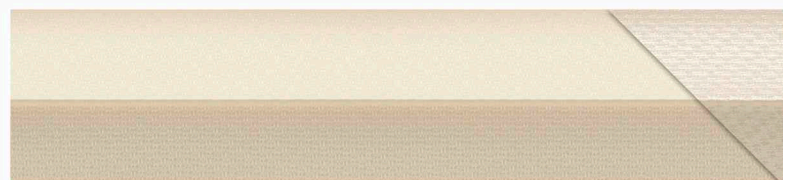

2320 cream

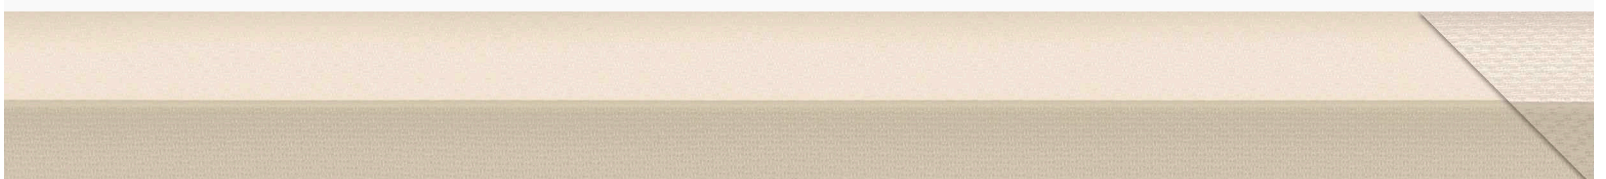

2372 ivory



4750 brown



2383 mocca

ALASCO-REFLEX 2016

Number	Colour	Width mm 2300	Light Properties			Solar Properties			Light Fastness	UV Trans- mission	Gtot - value	FC - value
			R	T	A	R	T	A				
1029	white	✓	68%	28%	4%	61%	33%	6%	6-7	6%	0,38	0,64
9210	silver	✓	57%	16%	27%	55%	30%	15%	6-7	2%	0,40	0,68
9134	light grey	✓	63%	25%	12%	58%	33%	9%	6-7	3%	0,41	0,59
9178	steel grey	✓	50%	8%	42%	52%	25%	23%	6-7	2%	0,44	0,62
9211	iron	✓	47%	3%	50%	51%	22%	27%	6-7	1%	0,41	0,69
1077	milk	✓	67%	30%	3%	59%	34%	7%	6-7	3%	0,38	0,64
2320	cream	✓	62%	27%	11%	57%	32%	11%	6-7	3%	0,39	0,66
2372	ivory	✓	65%	25%	10%	59%	31%	10%	6-7	2%	0,38	0,64
4750	brown	✓	57%	16%	27%	55%	28%	17%	6-7	2%	0,39	0,66
2383	mocca	✓	47%	2%	51%	48%	23%	29%	6-7	1%	0,42	0,71

All printed colours and textures only provide orientation and are not reference pattern.

Usable for Pleated Blinds
 Colour Range 10
 Composition 100 % PES
 Width 2300 mm
 Cutting Process cold
 Pleating Format 20 mm

Weight 110 g/m²
 Thickness 0,20 mm
 Damp room usable yes
 PVC free yes
 Halogen free yes
 OekoTex yes




Flame
retardant

DIN 4102, B1



Perlex



B semi-
transparent



suitable for
workstations



REACH-
compliant



by Gerhard van Clewe
GmbH & Co.KG



Standard 100
by Oeko-Tex®

R = Reflection, T = Transmission, A = Absorption • All light & solar properties have been tested internally or externally. • Gtot: measure total solar energy that passes through the glazing system and the fabric • Fc value: Relation between the total energy transmittance of glazing combined with the sun shading device gtot in combination with total energy transmittance of glazing g • Gtot and Fc-value are calculated on the basis of a glazing with an Ug-value of 1,2 and g-value of 0,59 according to DIN EN 14501 glass C. • All technical properties are subjected to production-related deviations. All fabrics are in line with the REACH regulation.